

TOUCH II

7" touchscreen, user friendly and totally programmable.
 Videos on display, ads, instructions.
 37 Languages.
 Free software for programming, telemetry, data analysis.
 USB Connection

OUTSTANDING FEATURES

Reversing drum action as standard.
 Stainless steel drum as standard.
 Frequency inverter as standard.

EFFICIENCY

EFFICIENT DRY - Intelligent humidity control, with new drum inlet temperature control.
 AIR RE-CYCLE - Efficient air recirculation system.
 THERMAL INSULATION - Complete air-flow circuit and double door glass.
 FULL FLOW - New 'optimized' system of mixed airflow.
 Big fluff filter.

VERSATILITY

Make to order - customisation.
 WET CLEANING.

CONNECTIVITY

Standard IoT Domus Connect.
 Management for laundries: OPL and self-service.

ERGONOMICS

Drawer as fluff filter, stainless steel mesh.
 Biggest door diameters.

MAINTENANCE

Hinged control panel: easy and ergonomic access.
 Technical menu: statistics for technicians.

OTHERS

Grey skinplate outer casing, stainless steel look.
NEW: Geared motor drive on models UDTT-100 to UDTT-180
 SFEX - Integrated Fire Extinguishing System.
 SOFT DRY - new drum with stamped holes.
 COOL DOWN - anti-wrinkle at the end of the cycle.
 Heating options: electric, gas and steam.
 CE approved




OPTIONS

- License IoT - Domus Connect
- Natural gas heated tumble dryer
- Opposite door opening UDTT-25 to UDTT-80
- Tropicalized model
- Dosing Spraying
- Back panel with air filter UDTM-25 to UDTM-80
- Fluff filter with grid 0,02 In (standard is 0,01 In)
- Fluff filter with grid 0.04 In (standard is 0,01 In)
- Stainless steel front and side panels UDTT-30/35
- Front panel in stainless steel UDTT-25/30/35
- Steam battery in stainless steel UDTT-25/30/35
- Low pressure steam battery UDTT-25/30/35
- Reduced power (12kw instead of 18kw) for electric heated 30 Lb. and 35 Lb. models.
- Maritime wooden packing UDTT-30/35

CAPACITY & DRUM	UNIT.	UDTT-35 ECO-ENERGY
Capacity 1/18	Kg	18.3
	lb	40.4
Capacity 1/20	Kg	16.5
	lb	36.3
Ø Drum	mm	750
	inch	29.53
Drum length	mm	746
	inch	29.37
Drum volume	l	330
	cu ft	11.64
Ø Door hole	mm	574
	inch	22.60
Door center height	mm	976
	inch	38.43
Height from floor to bottom of door	mm	618
	inch	24.33
ELECTRIC HEATING		
Evaporation capacity	L/h	14.90
	US gallon/h	3.94
Hourly output	Kg/h	30
	lb/h	66.1
Installed heating power	kW	18
Installed electrical power	kW	18.97
Drum motor power	kW	0.37
GAS HEATING		
Evaporation capacity (gas model)	L/h	16.30
	US gallon/h	4.3
Hourly output (gas model)	Kg/h	33.60
	lb/h	74.1
Installed gas heating power	kcal/h	17638
	Btu/h	70000
Installed gas heating power	kW	20.51
Installed electrical power	kW	0.97
Instant propane gas consumption (G31)	Kg/h	1.76
	lb/h	3.88
Instant natural gas consumption (G20)	m ³ /h	2.17
	cfm	1.28
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	30
	Btu/h	102364
Installed electrical power	kW	0.97
Steam consumption (8 barG) - Standard	kg/h	53
Steam consumption (116 psiG)	lb/h	63.8
Steam pressure	barG	6 - 9
	psiG	87 - 130.5
Standard steam inlet - outlet	BSPT- ISO7.1	3/4"
Standard steam inlet - outlet	NPT ANSI B1.20.1 Tapered	3/4"
Steam consumption (5 barG) - Low Pressure	kg/h	57
Steam consumption (72,5 psiG) - Low Pressure	lb/h	68.7
Steam pressure (low pressure)	barG	3 - 6
	psiG	43.5 - 87
Low pressure steam inlet - outlet	BSPT- ISO7.1	1"
THERMAL OIL HEATING		
Installed heating power	kW	-
Installed electrical power	kW	-
Fluid consumption (T max 175°C)	m ³ /h	-

Thermal oil connection	BSP	-	
VENTILATION			
Fan motor power	kW	0.55	
	m ³ /h	1200	
Nominal air flow rate	cfm	706.3	
Ø Fume exhaust	mm	200	
Ø Fume exhaust	inch	7.87	
HEAT EMISSION			
Maximum total heat emission	kW	1.44	
	Btu/h	4916.4	
Max. front heat emission	kW	0.9	
	Btu/h	3072.7	
CONNECTIONS			
Voltage 120/60/1~ + G	Nº x AWG / A	E	S
Voltage 230/3~ + G	-	-	3 x 12 / 20A
Voltage 480/3~ + G	-	-	-
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	785 / 865	
	inch	30,91 / 34,06	
Net / gross depth	mm	1.125 / 1.210	
	inch	44,29 / 47,64	
Net height / gross height without heating	mm	1.694 / 1.840	
	inch	66,69 / 72,44	
Net / gross weight	Kg	187 / 200	
	lb.	412,26 / 440,92	
OTHERS			
Sound level	dB	64	

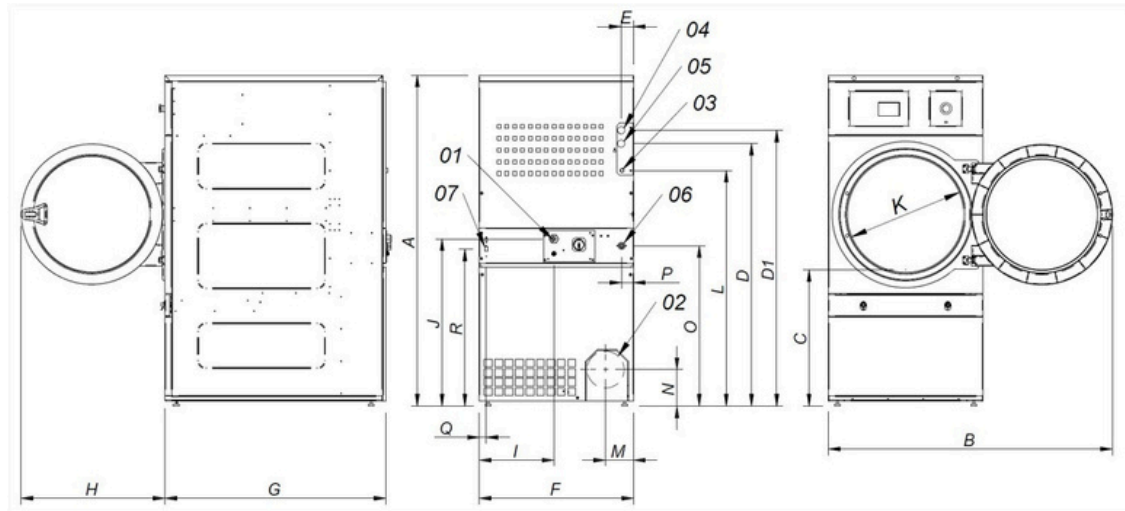

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"
- 04 Steam inlet 3/4"
(UDTT-25-30-35)
- 04 Steam inlet 1" (UDTT-50)
- 05 Condensate outlet 3/4"
(UDTT-25-30-35)
- 05 Condensate 1" (UDTT-50)
- 06 Sprinkler valve 3/4"
- 07 Ethernet connection (only TOUCH Control)

UDTT-35	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R
ECO-ENERGY	66.69	56.96	27.12	53.30	55.98	2.67	2.67	30.9	44.29	28.93	14.96	34.25	22.63	48.26	5.23	7.08	32.67	2.55	1.37	31.69