

UDTT-25/35/50 DYNAMIC TUMBLE DRYERS



TOUCH II

User friendly and totally programmable 7" Touchscreen control.
Program time-of-day promotions and discounts automatically.
Works with any external payment system.
USB Connection and PC software free of charge for programming, traceability, data analysis.
Videos on display (ads, instructions, etc.)
37 languages.



OUTSTANDING FEATURES

Stainless steel drum.
Extra-smooth drum perforations.
Reversing drum action.
Frequency inverter.
Transmission by direct drive.



EFFICIENCY

DUAL AIRFLOW - mixed axial-radial airflow.
Extra Large, stainless-steel lint filter.
Anti-wrinkle feature at the end of the cycle.



VERSATILITY

Make to order - customization.
WET CLEANING ready.
OPL <--> COIN - Standard OPL model that can be easily changed to vended laundry.



CONNECTIVITY

IoT Domus Connect. Remote access.
Management of laundries: OPL and COIN.
Remote payment (coin laundry).



ERGONOMICS

Accessible lint filter.
Large diameter doors.
Door opening direction adjustable on site.



MAINTENANCE

Hinged panel to access control board.
Easy and ergonomic access for service.
Technical menu: statistics, alarm, auto test, data recovery.



OTHERS

Easy-to-clean, skin-plate outer casing with stainless-steel look.
CE and ETL approved.




OPTIONS

- EFFICIENT DRY - Intelligent humidity control with new drum inlet temperature control
- Double pane door glass
- Reverse door opening
- SFEX - Integrated Fire Extinguishing System
- New dosing/vaporizing system
- DomusConnect communication kit
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Stainless steam battery
- Low pressure steam battery
- Wooden packing
- Exhaust silencer Ø 8"
- Rear panel external air + filter
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

| TECHNICAL DATA | UNIT. | UDTT- 25 | UDTT- 35 | UDTT- 50 | | | |
|--|-------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|
| CAPACITY | | | | | | | |
| Capacity 1/18 | lb | 26 | 40 | 60 | | | |
| Capacity 1/20 | lb | 25 | 35 | 50 | | | |
| Hourly Output * | lb/h | 63 | 70 | 89.5 | | | |
| Evaporation Capacity * | l/h | 14.5 | 16.3 | 20.4 | | | |
| DRUM | | | | | | | |
| Ø Drum | in | 29.50 | 29.50 | 33.70 | | | |
| Ø Door | in | 22.50 | 22.50 | 22.50 | | | |
| Door Center Height | in | 38.50 | 38.50 | 40.50 | | | |
| Door Bottom Height | in | 27 | 27 | 29.25 | | | |
| Drum Depth | in | 18.70 | 29.50 | 31.50 | | | |
| Drum Volume | cu ft | 7.42 | 11.65 | 16.24 | | | |
| POWER | | | | | | | |
| Drum motor power | hp | 1/2 | 1/2 | 1/2 | | | |
| Fan motor power | hp | 0.33 | 0.33 | 0.75 | | | |
| Electric heating power (elec model) | kW | Not Available | Not Available | Not Available | | | |
| Total electric power (elec.model) | kW | Not Available | Not Available | Not Available | | | |
| Gas heating power | btu/h | 70,000 | 70,000 | 105,000 | | | |
| Total electric power (gas model) | kW | 0.89 | 0.89 | 1.3 | | | |
| Steam heating power | kW | 40 | 40 | 66 | | | |
| Steam heating power (gas model) | kW | 0.89 | 0.89 | 1.3 | | | |
| CONNECTIONS | | ELECTRICAL | STEAM / GAS | ELECTRICAL | STEAM / GAS | ELECTRICAL | STEAM / GAS |
| 120 V / 60 Hz / 1 | FLA | - | 20 | - | 20 | - | 20 |
| 208-240 V / 50-60 Hz / 1 | FLA | Not Available | - | Not Available | - | Not Available | - |
| 208-240 V / 50-60 Hz / 3 | FLA | Not Available | - | Not Available | - | Not Available | - |
| Gas connection | in | 1/2" | | 1/2" | | 1/2" | |
| DIMENSIONS / PACKING DIMENSIONS | | | | | | | |
| Net Width / Gross Width | in | 30.9 / 34.0 | | 30.9 / 34.0 | | 35.0 / 38.0 | |
| Net Depth / Gross Depth | in | 33.7 / 37.0 | | 44.3 / 48.0 | | 49.4 / 53.0 | |
| Net Height / Gross Height | in | 66.7 / 73.0 | | 66.7 / 73.0 | | 71.3 / 76.0 | |
| Height without heating battery | in | - | | - | | - | |
| Net weight / Gross weight | lb | 379.1 / 396 | | 412.1 / 440 | | 462.8 / 485 | |
| OTHERS | | | | | | | |
| Max airflow | CFM | 500 | | 500 | | 706 | |
| Ø Duct Size | in | 8 | | 8 | | 8 | |
| Sound level | dB | 64 | | 64 | | 65 | |

* It may vary depending on the type of heating, filter cleanliness or extraction type.

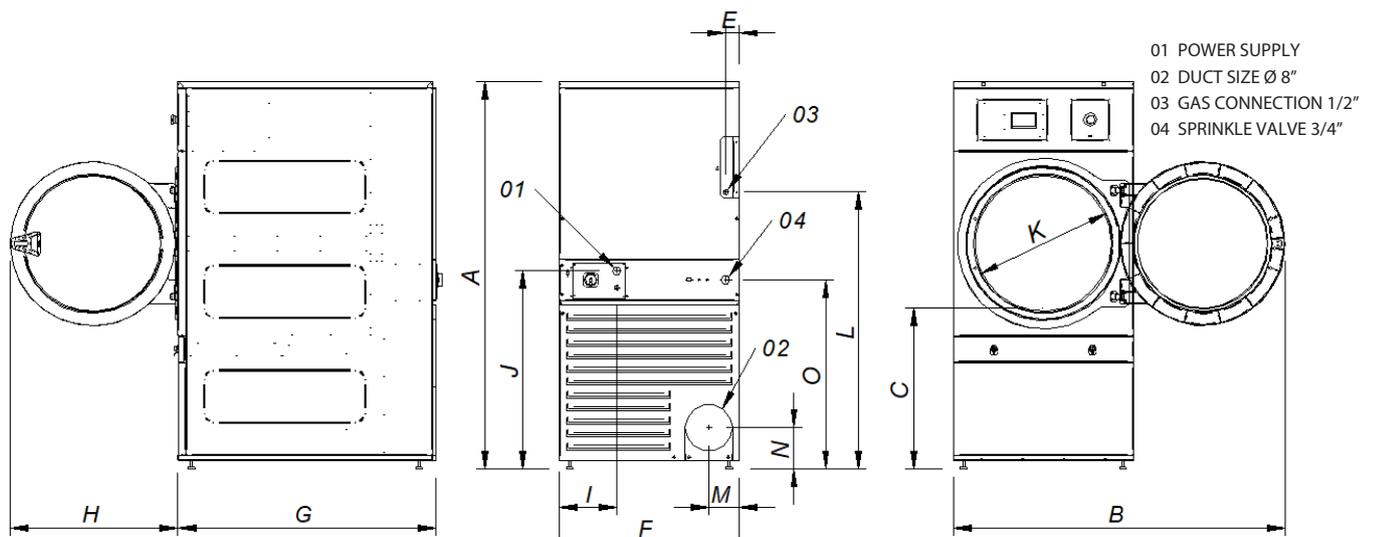

| Model | | A | B | C | E | F | G | H | I | J | K | L | M | N | O |
|---------|----|------|----|------|-----|------|------|------|-----|------|------|------|------|-----|------|
| UDTT-25 | in | 67.7 | 57 | 27 | 2.7 | 30.9 | 33.7 | 28.9 | 3.7 | 32.3 | 22.6 | 48.3 | 5.25 | 7.1 | 32.7 |
| UDTT-35 | in | 67.7 | 57 | 27 | 2.7 | 30.9 | 44.3 | 28.9 | 3.7 | 32.3 | 22.6 | 48.3 | 5.25 | 7.1 | 32.7 |
| UDTT-50 | in | 71.3 | 61 | 29.3 | 4.4 | 35.0 | 49.4 | 28.9 | 8.1 | 33.9 | 22.6 | 52.9 | 5.25 | 7.1 | 34.3 |